

# ALTAFLUOR® 400

PFA (perfluoroalkoxy) is the product of choice for applications involving extreme chemical resistance combined with high temperature exposure. Although PFA is available in a variety of resin grades, ALTAFLUOR® 400 PFA tubing is made exclusively from the highest molecular weight resins available giving it superior physical properties making it suitable for even the most demanding applications. ALTAFLUOR® 400 is compatible with flare or conventional type fittings.

## ALTAFLUOR® 400 FEATURES

- 100% virgin grade high performance resins used to resist stress cracking
- Chemically inert to nearly all industrial chemicals and solvents
- Higher thermal stability than with FEP
- Lower permeability than with FEP
- Translucent
- Moisture absorption nearly zero
- FDA compliant for food contact
- Non-flammable
- Suitable for use with flare or conventional fittings
- Available in coiled hose and convoluted constructions
- Low permeation PFA tubing is also available

## APPLICATIONS

- Chemical process
- Heat exchangers
- Laboratory applications
- Semiconductor
- Flow monitoring
- Food processing
- Electrical insulation
- Automotive

## SPECIFICATIONS

**General:** Meets or exceeds the requirements listed in ASTM D 6867-03

**Temperature:** -300 °F to 500 °F

**Flammability:** UL 94 VO rated. PFA resists combustion and does not promote flame spread

**FDA:** ALTAFLUOR® 400 PFA is approved for use in food contact applications in compliance with FDA regulation: 21 CFR 177.1550

**USP CLASS VI:** ALTAFLUOR® 400 meets the requirements of USP Class VI

## ALTAFLUOR® 400 PFA - TUBING

PART NUMBER	ID	OD	+/-	WALL	+/-
400-0062-015-XX	1/32	1/16	.003	0.015	.003
400-0125-030-XX	1/16	1/8	.004	0.030	.003
400-0156-030-XX	3/32	5/32	.004	0.030	.003
400-0188-030-XX	1/8	3/16	.004	0.030	.003
400-0250-030-XX	3/16	1/4	.004	0.030	.003
400-0313-030-XX	1/4	5/16	.005	0.030	.003
400-0375-030-XX	5/16	3/8	.005	0.030	.003
400-0438-030-XX	3/8	7/16	.005	0.030	.003
400-0500-030-XX	7/16	1/2	.005	0.030	.003
400-0562-030-XX*	1/2	9/16	.005	0.030	.003
400-0625-030-XX*	9/16	5/8	.005	0.030	.003
400-0688-030-XX*	5/8	11/16	.005	0.030	.003
400-0750-030-XX*	11/16	3/4	.005	0.030	.003
400-0250-040-XX	.170	1/4	.004	0.040	.003
400-0250-047-XX	.156	1/4	.004	0.047	.003
400-0188-062-XX	1/16	3/16	.005	0.062	.003
400-0250-062-XX	1/8	1/4	.005	0.062	.003
400-0375-062-XX	1/4	3/8	.005	0.062	.003
400-0438-062-XX	5/16	7/16	.005	0.062	.003
400-0500-062-XX	3/8	1/2	.005	0.062	.003
400-0625-062-XX	1/2	5/8	.005	0.062	.003
400-0750-062-XX	5/8	3/4	.005	0.062	.003
400-0875-062-XX*	3/4	7/8	.005	0.062	.003
400-1000-062-XX	7/8	1	.005	0.062	.003
400-1125-062-XX	1	1-1/8	.006	0.062	.003
400-1250-062-XX**	1-1/8	1-1/4	.006	0.062	.003

\* Custom item - please consult factory for lead time and minimum order requirements.

\*\* Available in straight lengths only.

Additional sizes up to 3" OD are available as custom extrusions - minimum order requirements may apply. Please contact Altaflo office for details.

Stocked in natural color - please consult factory for details on available colors.

**NEW: High Purity PFA is available - please see ALTAFLUOR® 480 SERIES UHP PFA**



P: 973-300-3344

F: 973-300-3345

E: sales@altaflo.com

A: 23 Wilson Drive, Sparta, NJ 07871

ALTAFLUOR® is a registered trademark of Altaflo LLC

TEFLON™ is a brand of Chemours

NEOFLO® is a registered trademark of Daikin

KYNAR® and KYNAR FLEX® are registered trademarks of Arkema Inc.

Due to the nature of applications involving the use of fluoropolymers, we suggest that all customers test product within the conditions specific to their application prior to use.

#### ALTAFLUOR® 400 PFA - BEND RADIUS AND WORKING PRESSURE CHART

PART NUMBER	OD	WALL	ID	BEND RADIUS	WORKING PRESSURE @ 73°F
400-0125-030-XX	0.125	0.030	0.062	1/2"	449
400-0156-030-XX	0.156	0.030	0.094	1/2"	360
400-0188-030-XX	0.188	0.030	0.125	3/4"	299
400-0188-062-XX	0.188	0.062	0.062	1/2"	617
400-0250-030-XX	0.250	0.030	0.188	1"	225
400-0250-040-XX	0.250	0.040	0.170	1"	300
400-0250-047-XX	0.250	0.047	0.157	3/4"	352
400-0250-062-XX	0.250	0.062	0.125	1/2"	464
400-0313-030-XX	0.313	0.030	0.250	1-3/4"	179
400-0313-062-XX	0.313	0.062	0.188	1"	371
400-0375-030-XX	0.375	0.030	0.313	2-1/2"	150
400-0375-062-XX	0.375	0.062	0.250	1"	310
400-0438-030-XX	0.438	0.030	0.375	3-1/2"	128
400-0438-062-XX	0.438	0.062	0.313	2"	265
400-0500-030-XX	0.500	0.030	0.438	4"	112
400-0500-062-XX	0.500	0.062	0.375	2"	232
400-0625-030-XX	0.625	0.030	0.562	6-1/2"	90
400-0625-062-XX	0.625	0.062	0.500	3"	186
400-0750-030-XX	0.750	0.030	0.688	8"	75
400-0750-062-XX	0.750	0.062	0.625	6"	155
400-0875-062-XX	0.875	0.062	0.750	12"	133
400-1000-062-XX	1.000	0.062	0.875	22"	116
400-1125-062-XX	1.125	0.062	1.000	N/A	105
400-1250-062-XX	1.250	0.062	1.125	N/A	84

The above information is based on tests performed at 73° F and can vary in individual applications based on parameters such as temperature, chemical concentration, pressure, etc. Please consult factory for details. For an estimate on burst pressure at ambient temperature we consider a 3:1 ratio when exposure temperature is 73° F. However Altaflo does not recommend exceeding the suggested Working Pressure listed.

METRIC SIZES	OD	WALL	ID	BEND RADIUS	WORKING PRESSURE @ 73°F
400-0157-040-XX	0.157	0.040	0.078	1-1/2"	468
	4mm	1mm	2mm		
400-0236-040-XX	0.236	0.040	0.157	1-3/4"	312
	6mm	1mm	4mm		
400-0315-040-XX	0.315	0.040	0.236	2-1/2"	234
	8mm	1mm	6mm		
400-0394-040-XX	0.394	0.040	0.315	2-3/4"	187
	10mm	1mm	8mm		
400-0472-040-XX	0.472	0.040	0.394	4"	156
	12mm	1mm	10mm		

#### ALTAFLUOR® 400 SERIES PFA - PHYSICAL PROPERTIES

PHYSICAL PROPERTY	ASTM TEST METHOD	UNITS	VALUES
Upper Service Temp.			500° F
Specific Gravity	D 792		2.15
Tensile Strength	D 1708	PSI	4200
Elongation	D 638	%	400
Flex Modulus	D 790	PSI	90,000
MIT Flex Life	D 2176		500,000+
Hardness	D 2240	Shore D	60

The above information is based on tests performed at 73° F and can vary in individual applications based on parameters such as temperature, chemical concentration, pressure, etc. Please consult factory for details.

NOTE: The values represented above are based on the use of 100% virgin grade high performance - low melt flow PFA resin as used in the production of ALTAFLUOR® 400 Series Tubing. When comparing data it is critical that performance values are listed for the grade of resin used.

**NEW: High Purity PFA is available - please see ALTAFLUOR® 480 SERIES UHP PFA**



P: 973-300-3344

F: 973-300-3345

E: sales@altaflo.com

A: 23 Wilson Drive, Sparta, NJ 07871

ALTAFLUOR® is a registered trademark of Altaflo LLC

TEFLON™ is a brand of Chemours

NEOFLO® is a registered trademark of Daikin

KYNAR® and KYNAR FLEX® are registered trademarks of Arkema Inc.

## ALTAFLUOR® 400 PFA - TUBING

PART NUMBER METRIC SIZES	ID	OD	+/-	WALL	+/-
400-0157-040-XX	2mm	4mm	.005	1mm	.003
	.079	.157	.005	0.040	.003
400-0197-040-XX	3mm	5mm	.005	1mm	.003
	.118	.197	.005	0.040	.003
400-0236-040-XX	4mm	6mm	.005	1mm	.003
	.157	.236	.005	0.040	.003
400-0276-040-XX	5mm	7mm	.005	1mm	.003
	.197	.276	.005	0.040	.003
400-0315-040-XX	6mm	8mm	.005	1mm	.003
	.236	.315	.005	0.040	.003
400-0354-040-XX	7mm	9mm	.005	1mm	.003
	.276	.354	.005	0.040	.003
400-0394-040-XX	8mm	10mm	.005	1mm	.003
	.315	.394	.005	0.040	.003
400-0433-040-XX	9mm	11mm	.005	1mm	.003
	.354	.433	.005	0.040	.003
400-0472-040-XX	10mm	12mm	.005	1mm	.003
	.394	.472	.005	0.040	.003
400-0551-040-XX	12mm	14mm	.005	1mm	.003
	.472	.551	.005	0.040	.003
400-0630-040-XX	14mm	16mm	.005	1mm	.003
	.551	.630	.005	0.040	.003
400-0354-059-XX	6mm	9mm	.005	1.5mm	.003
	.236	.354	.005	0.059	.003
400-0472-059-XX	9mm	12mm	.005	1.5mm	.003
	.354	.472	.005	0.059	.003

Additional sizes up to 3" OD are available as custom extrusions - minimum order requirements may apply. Please contact Altaflo office for details.

Stocked in natural color - please consult factory for details on available colors.

**NEW: High Purity PFA is available - please see ALTAFLUOR® 480 SERIES UHP PFA**

## ALTAFLUOR® 400 PFA - STANDARD CONVOLUTED CONSTRUCTION

PART NUMBER	NOMINAL OD SIZE	ID MIN	ID MAX	OD MAX	NOMINAL WALL	CONVOLUTIONS PER INCH
40C-0375-020-XX*	3/8	0.251	0.275	0.375	0.020	6
40C-0500-023-XX*	1/2	0.364	0.375	0.500	0.023	6
40C-0625-025-XX*	5/8	0.485	0.500	0.625	0.025	5.5
40C-0750-025-XX*	3/4	0.608	0.625	0.750	0.025	5
40C-0875-025-XX*	7/8	0.730	0.750	0.875	0.025	4
40C-1000-025-XX*	1	0.860	0.875	1.000	0.025	3.5

\*Custom item - please consult factory for lead time and minimum order requirements.

## ALTAFLUOR® 400 PFA - ULTRA FLEX CONVOLUTED CONSTRUCTION

PART NUMBER	NOMINAL OD SIZE	ID MIN	ID MAX	OD MAX	NOMINAL WALL	CONVOLUTIONS PER INCH
40U-0375-020-XX*	3/8	0.251	0.275	0.375	0.020	9
40U-0500-023-XX*	1/2	0.364	0.375	0.500	0.023	9
40U-0625-025XX*	5/8	0.485	0.500	0.625	0.025	9
40U-0750-025-XX*	3/4	0.608	0.625	0.750	0.025	8
40U-0875-025-XX*	7/8	0.730	0.750	0.875	0.025	8
40U-1000-025-XX*	1	0.860	0.875	1.000	0.025	8


\*Custom item - please consult factory for lead time and minimum order requirements.

## ALTAFLUOR® 400 PFA - TUBING SCHEDULE 40 PIPE

PART NUMBER	NOMINAL SIZE	ACTUAL SIZE	WALL	STOCK LENGTH
400-0540-098-0C*	1/4"	.540" ± .010	.098" ± .010	5ft / 10ft
400-0840-119-0C*	1/2"	.840" ± .010	.119" ± .010	5ft / 10ft
400-1050-123-0C*	3/4"	1.050" ± .010	.123" ± .010	5ft / 10ft
400-1315-143-0C*	1"	1.315" ± .010	.143" ± .010	5ft / 10ft
400-1660-150-XX*	1-1/4"	1.660" ± .015	.150" ± .010	10ft
400-1900-155-XX*	1-1/2"	1.900" ± .015	.155" ± .010	10ft
400-2375-164-XX*	2"	2.375" ± .015	.164" ± .010	10ft

\*Custom item - please consult factory for lead time and minimum order requirements. Please see ALTAFLUOR® 480 Pipe for stock items. Additional sizes and Schedule 80 Pipe available upon request. Custom item - see Coiled Hose Order Form for ordering information. Please consult factory for additional details. 480 SERIES UHP PFA is a stock item and available for immediate shipment.

## ALTAFLUOR® 400 PFA - COILED HOSE

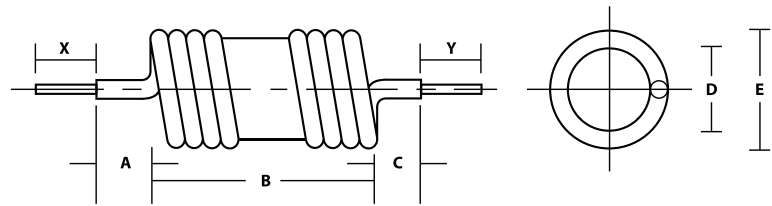

Custom item - see Coiled Hose Order Form for ordering information. Please consult factory for additional details.



**P: 973-300-3344**  
 F: 973-300-3345  
 E: sales@altaflo.com  
 A: 23 Wilson Drive, Sparta, NJ 07871

ALTAFLUOR® is a registered trademark of Altaflo LLC  
 TEFLON™ is a brand of Chemours  
 NEOFLON® is a registered trademark of Daikin  
 KYNAR® and KYNAR FLEX® are registered trademarks of Arkema Inc.